


## JC7 Series Thermoplastic hose - Water-proof Cover\*

- WORKING PRESSURE FROM 200 BAR/3.000 PSI TO 275 BAR/4.000 PSI
- SUPER SLIDING AND ABRASION RESISTANT
- LOW VOLUMETRIC EXPANSION AND PRESSURE LOSSES
- HIGH OPERATING SPEED AND FLOATATION
- AVAILABLE ALSO IN SIZE 1 1/4" -24



GENERAL INDUSTRY

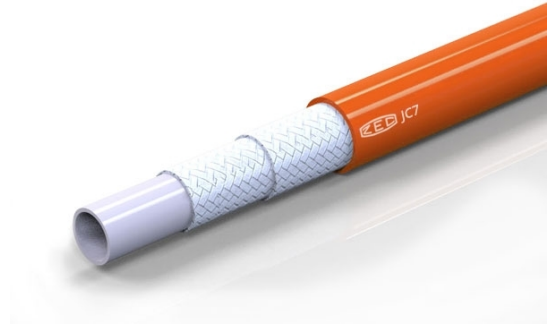

HIGH PRESSURE



WATER

## TECHNICAL FEATURES

Metric

Code	ID			OD	1:2,5 WP	R MIN	g
	inch	mm	DN				
JC767101	1/2"	13.0	12	22.4	275	75	277
JC777101	5/8"	16.0	16	26.5	220	100	372
JC787101	3/4"	19.2	19	29.8	207	120	431
JC797101	1"	25.6	25	37.7	207	150	580
JC7107101	1"1/4	32.0	32	46.0	207	235	926
JC7127101	1"1/2	38.2	38	54.0	207	375	1186

## TECHNICAL FEATURES

### Reels length:

80-100-120-150-180-200-250 m

### Technical-constructive features:

Inner core in thermoplastic compound, reinforcement in double polyester fiber braid and outside covering in antiabrasion polyurethane, pin-pricked, stabilized to UV rays and resistant to hydrolysis for outdoor applications, in environments having high humidity and saline levels.

### Applications:

The JC7 Series hoses have been created for water applications in the high pressure cleaning field.

### Working temperature:


from -40°C to +55°C from -40°F to +131°F

### Working pressure:

Safety ratio 1:2,5

\*The water-proof feature of the cover means that the hose is especially suitable for wet and saline environments where there are extreme temperature changes.

## OPTIONAL



For any further information about the optional items, please contact the sales office ()