



72FLQ3 **FLANGIA 45° SAE 3000**
45° FLANGE SAE 3000

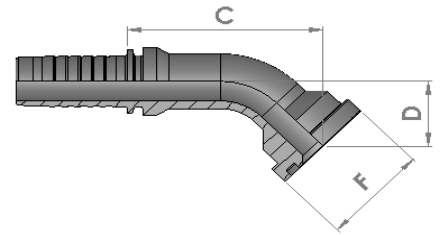

part ref.	Hose ID		Flange	Dimension (mm)			Weight
	[in]	size	Size F	Flange F	Cut-off C	Drop D	Kg
72FLQ30808	1/2"	08	1/2"	30,2	51	22	0,107
72FLQ31208	1/2"	08	3/4"	38,1	54	25	0,165
72FLQ31212	3/4"	12	3/4"	38,1	70	30	0,220
72FLQ31612	3/4"	12	1"	44,5	73	31	0,295
72FLQ31616	1"	16	1"	44,5	82	35	0,384
72FLQ32016	1"	16	1.1/4"	50,8	87	37	0,451
72FLQ32020	1.1/4"	20	1.1/4"	50,8	100	47	0,587
72FLQ32420	1.1/4"	20	1.1/2"	60,4	102	49	0,645
72FLQ32424	1.1/2"	24	1.1/2"	60,4	111	50	0,884
72FLQ33224	1.1/2"	24	2"	71,4	113	52	0,848
72FLQ33232	2"	32	2"	71,4	129	47	1,548
72FLQ34040*	2.1/2"	40	2.1/2"	84,1	75	30	1,430
72FLQ34848*	3"	48	3"	101,6	95	35	2,040

* SALDATA / WELDED

72FL6 **FLANGIA DIRITTA SAE 6000**
STRAIGHT FLANGE SAE 6000



part ref.	Hose ID		Flange	Dimension (mm)			Weight
	[in]	size	Size F	Flange F	Cut-off C		Kg
72FL60808	1/2"	08	1/2"	31,7	46		0,121
72FL61208	1/2"	08	3/4"	41,3	53		0,203
72FL61212	3/4"	12	3/4"	41,3	54		0,244
72FL61612	3/4"	12	1"	47,6	60		0,316
72FL61616	1"	16	1"	47,6	61		0,395
72FL62016	1"	16	1.1/4"	54	68		0,500
72FL62020	1.1/4"	20	1.1/4"	54	70		0,608
72FL62420	1.1/4"	20	1.1/2"	63,5	76		0,803
72FL62424	1.1/2"	24	1.1/2"	63,5	76		0,849
72FL63224	1.1/2"	24	2"	79,4	85		1,155
72FL63232	2"	32	2"	79,4	85		1,327